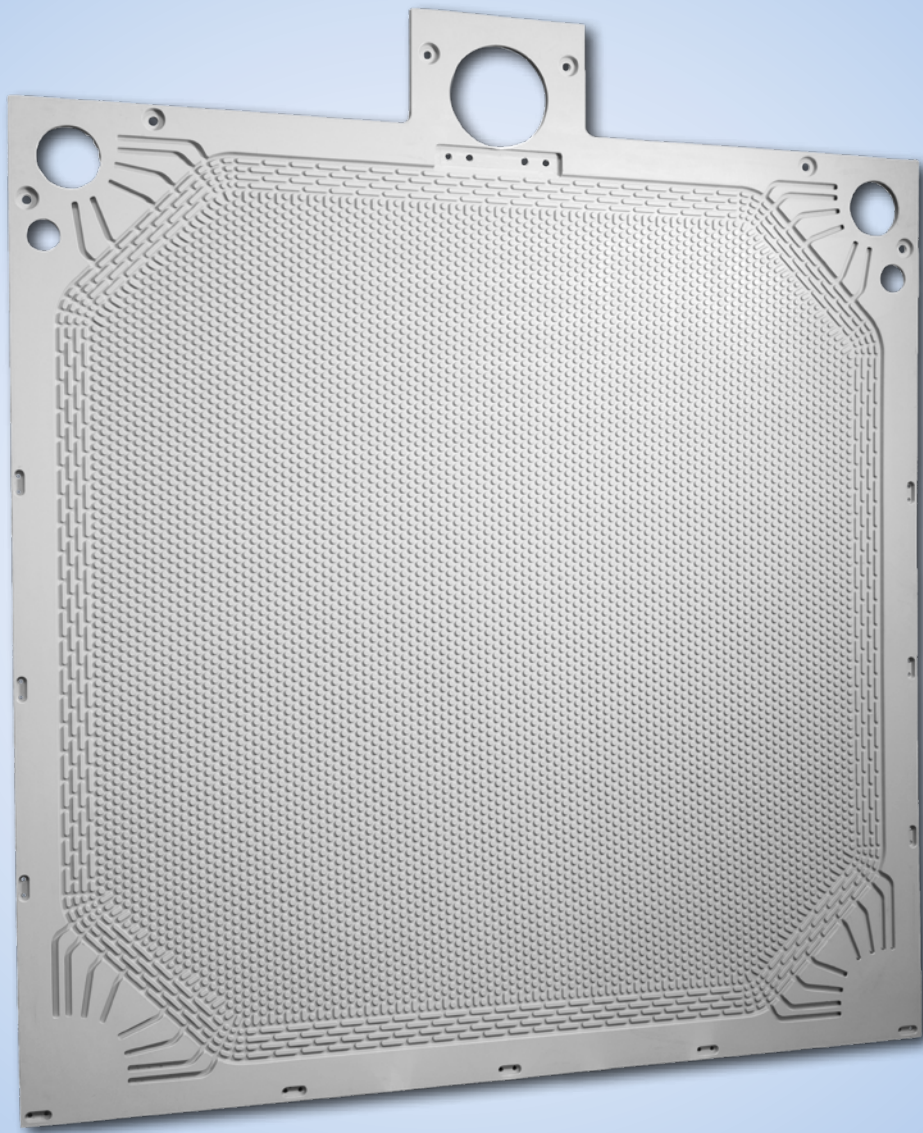

MHA 1300 RUM NO PPC/PPH

EXCHANGEABLE OVERHANGING MEMBRANE HALVE



SUITABLE FOR SUGAR INDUSTRY

TIME AND COST SAVING

FEATURES

- + Designed for sugar industry
- + Membrane halve design incorporates external feed port only
- + Exchange is easy and free of hassle
- + Membrane halve is screwed to the plate at the corner bore holes and at the inlet area

BENEFITS

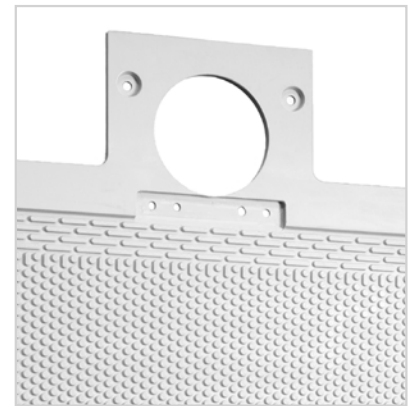
- + Time saving installation
- + Cost saving maintenance
- + Easy exchange even after years of operation and without any body plate mismatch
- + Variations of the web thickness allow high filtration and squeezing pressures



Detailed view of corner bore hole



Detailed view of gasketed membrane center web



Detailed view of external feed port

FURTHER DATA

Squeezing pressure	7,5 bar [85°C]
Maximum filtration temperature	Up to 100°C
Corner hole	Can be adjusted variably

WE DO HIGHLY RECOMMEND THE EXCHANGE OF THE SEALING COARDS WHILE MEMBRANE REPLACEMENT, AS WELL!



LENSER Filtration GmbH
Breslauer Strasse 8
89250 Senden
Germany

p. +49 7307 / 801-0
info@lenser.de
lenser.de/en

All data, information, statements, photographs and graphic illustrations in this leaflet are without any obligation and raise no liabilities to or form part of any sales contracts of LENSER Filtration GmbH or any affiliates for equipment and/or systems referred to herein.

© LENSER Filtration GmbH 2020. All rights reserved. No part of this copyrighted work may be reproduced, modified or distributed in any form or by any means, or stored in any database or retrieval system, without the prior written permission of LENSER Filtration GmbH or its affiliates. Any such unauthorized use for any purpose is a violation of the relevant copyright laws. LENSER Filtration GmbH, Breslauer Strasse 8, 89250 Senden, Germany. LEN.EN.02.04.20

